

## STANDARD



ISOblow Standard er ideell til indblæsning af træfiberisolering, men er også egnet til cellulose- og mineralfiberisolering. Især kortfibrede isoleringsmaterialer kræver et højt luftstrømningsvolumen. En ny blæsergeneration overbeviser med sin høje luftydelse og lange levetid.

ISOblow Standard er ideell for bearbejdelse av isolasjonsmateriale av trefiber, men også av cellulose og mineralfiber. Nettopp isolasjonsmateriale med korte fiber forlenger et svært høyt luftstrømningsvolumen. En ny viftegenerasjon overbeviser med høy lutteffekt og lang levetid.

The ISOBLOW Standard is ideal for installation of wood fibre insulation. Short-fibre insulation demands a very high air-flow volume. Three blowers integrated inside the machine ensure the required air-flow performance. Special features of the new blower generation are high air-flow performance and durability.




Art.Nr.: 610047

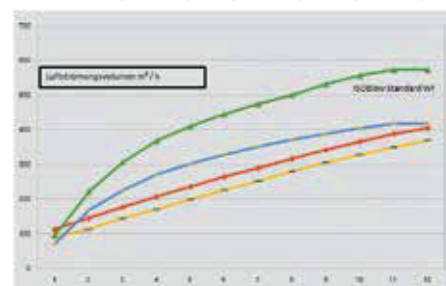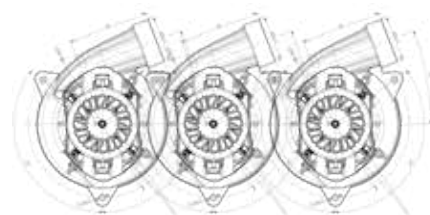

3 blæsere sikrer en luftvolumen på mere end 500 m<sup>3</sup>/h.

3 vifter sørger for et luftvolum på over 500 m<sup>3</sup>/t.

3 blowers provide a volume of over 500 m<sup>3</sup> air / h.

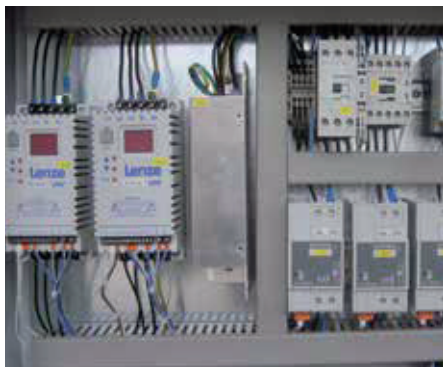

TEKNISKE SPECIFIKATIONER | TEKNISKE DATA | TECHNICAL DATA

## ISOBLOW STANDARD


 100 x 82 x 168 cm


 250 kg

 410 l = 2 pose/pakke ISOCELL

 1 x 0,75 kW, 1 x 1,1 kW

 230 V = 3 x 1,4 kW } 6,05 kW

 350 mbar (max) / 570 m<sup>3</sup> / h (max)

 400 V / 50 Hz, 16 A | 230 V / 50 Hz, 16 A

 3" (76 mm)

### Transportydelse | Transporteffekt | Output

 ~ 1300 kg / h

 ≤ 50 cm

 ~ 800 kg / h

 ≤ 40 cm

Egnet til alle typer indblæsningsisolering  
Egnet for alle innblåsnings-isolasjonsmateriale  
Suitable for all – insulation materials

