

TP15H

Petrol generator set
15 kVA, 400 V / 230 V, 50 Hz

TECHNICAL DATA

• Prime power 400 V	15 kVA / 12 kW
• Prime power 230 V	8 kVA / 8 kW
• Voltage	400 / 230 V
• Frequency	50 Hz
• Fuel tank capacity	20 l
• Fuel consumption at 75% load	5,4 l/h
• Noise level, Lwa	97 dB
• Weight	146 kgs



ENGINE

• Manufacturer	Honda
• Model	GX 690
• Power at 3600 RPM	22,1 HP
• Rotation speed	3000 RPM
• Displacement	688 cm ³
• Number of cylinders	2
• Bore / Stroke	77 / 72 mm
• Compression	9,3 : 1
• Cooling	Air cooled
• Ignition system	Transistorized
• Engine oil capacity	1,9 l
• Protection from a low oil level	Yes

ALTERNATOR

• Manufacturer	NSM
• Number of poles	2
• Type	With brushes
• Voltage accuracy	+5%, -5%
• Power factor, Cos φ	0,8
• Voltage regulator	Compound
• Protection level	IP 23
• Insulation class	H



TP15H

Petrol generator set
15 kVA, 400 V / 230 V, 50 Hz

EQUIPMENT


Electric starter	<input checked="" type="checkbox"/>	Wheels and handles kit	<input type="checkbox"/>
Sockets: 1pc CEE (32A 400V), 1pc CEE (32A 230V)	<input checked="" type="checkbox"/>	Earthing rod	<input type="checkbox"/>
Thermal overload protection	<input checked="" type="checkbox"/>	Automatic voltage regulator (AVR)	<input type="checkbox"/>
Protection from a low oil pressure / level	<input checked="" type="checkbox"/>	Automatic mains failure (AMF)	<input type="checkbox"/>

- Standard equipment
- Optional equipment

OTHER INFORMATION

- Warranty **12 months**
- Warranty for Honda engine **36 months**
- Electric power according to **ISO 8528**

DIMENSIONS

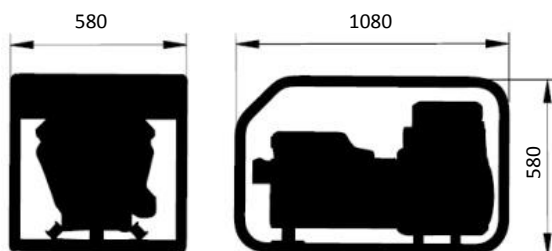

GENERGA
generating sets

UAB "Generga"
Naglio str. 4A
LT - 52367 Kaunas, Lithuania
Tel: +370 37 455456
Email: info@generga.com
www.generga.com



Distributed by