


## OMEGA Nail-Seal Tape

A bitumen tape, adhesive on one or both sides, that is attached along the full length between the diffusive roof underlay and the counter-batten. It prevents ingress of rainwater and guarantees optimum wind-tightness of the construction. Tested for protection from rain by the Austrian Wood Research Association, (Holzforschung Austria Order no. 203/2003/2 T/HH)

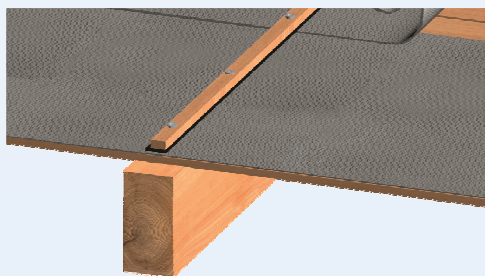

### FIELD OF APPLICATION:

Nail seal for roof underlays

### PRODUCT DATA :

<b>Composition:</b>	self-adhesive bitumen tape		
<b>Working temperature:</b>	from + 5°C		
<b>Temperature resistance:</b>	- 40°C to + 100°C		
<b>Storability:</b>	1 year (cool and dry)		
<b>Thickness:</b>	2 mm		
<b>Roll length:</b>	10 m		
<b>Adhesive one side:</b>			
<b>Roll width:</b>	50 mm	60 mm	80 mm
<b>Rolls / carton:</b>	20	16	12
<b>Adhesive both sides DSK:</b>			
<b>Roll width:</b>	50 mm	60 mm	
<b>Rolls / carton:</b>	6	6	

In accordance with ÖNORM B 4119 a nail-seal tape with a width of minimum 50mm must be used.

### APPLICATION:

Attach **OMEGA Nail Seal Tape** to the roof sheeting directly beneath the counter-batten. The sealing tape encloses the nail completely and achieves a **100% sealed** penetration point!

See Guidelines for **OMEGA** Roof Underlay.

The standards according to ÖNORM B 4119 and/or ZVDH (Central Association of German Roofers) must be observed.

12.2013/ BP/CN

www.isocell.at Info- Tel.: +43 (0) 6216 / 4108